

FEATURES

Low power consumption.

High Efficiency

Round type

T1 (3mm) diameter

With Flange

Solder leads without stand-off

Compliant with RoHS

DESCRIPTIONS

Emitting Color: Pure Green


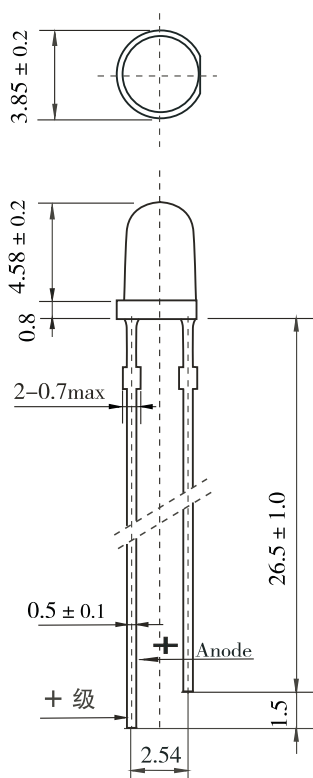
Lens Color: Water Clear

ATTENTION



OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES

OUTLINE DRAWING



Tolerance is $\pm 0.25\text{mm}$

Unless Otherwise Specified.

ELECTRICAL OPTICAL CHARACTERISTICS (Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	V_F		3.20	3.40	V	IF=20mA
Luminous Intensity	I_V	3000	4500		mcd	IF=20mA
Peak Wavelength	λ_P		525		nm	IF=20mA
Spectral Line half-width	$\Delta \lambda$		30		nm	IF=20mA
Reverse Leakage Current	I_R			50	μA	VR=5V
Viewing Angle	$2\theta_{1/2}$		30		Deg	IF=20mA

ABSOLUTE MAXIMUM PARAMETERS (Ta=25°C)

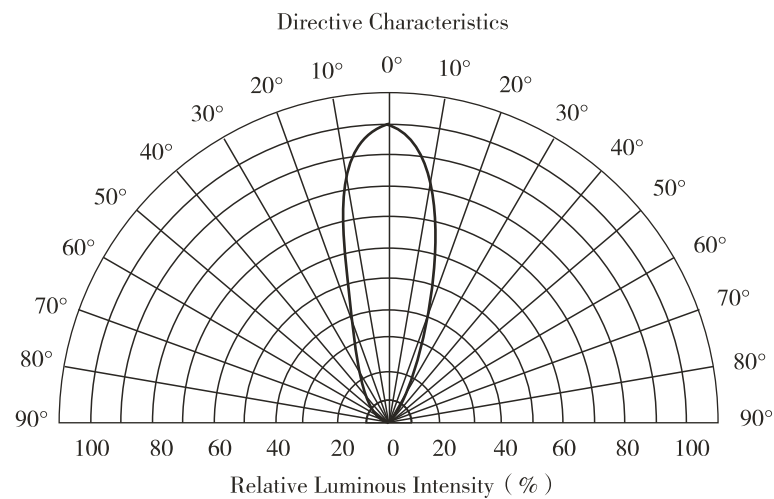
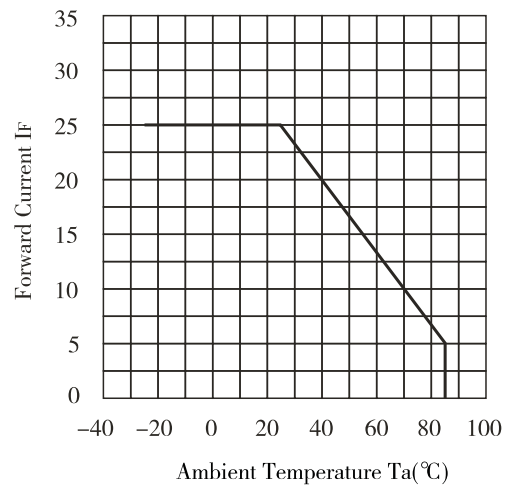
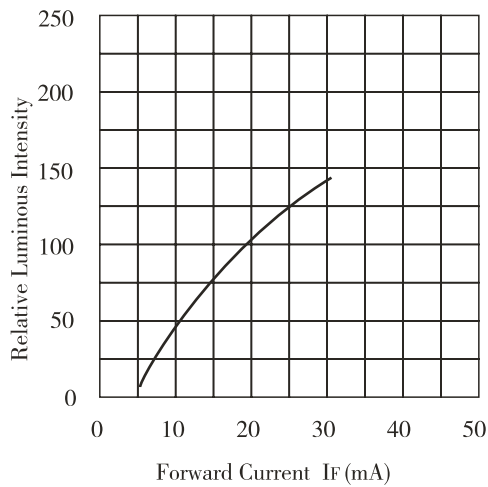
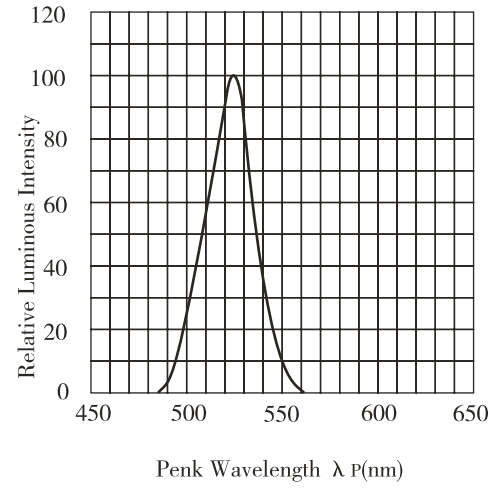
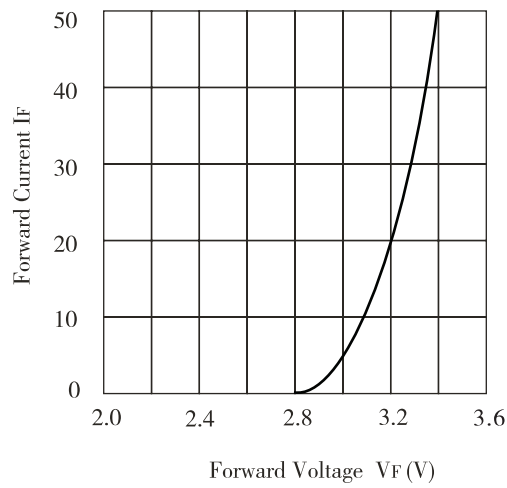
Parameter	Symbol	Condition	Rating	Unit
Power Dissipation	P_D	---	75	mW
Reverse Voltage	V_R	IR=50 μA	5	V
Forward Average Current	I_F	---	30	mA
Temperature coefficient	I/C	---	0.4	mA/ °C
Pulse Current	IFP	Duty=1/10,1kHz	100	mA
Operating Temperature Range	Topr	---	-25 ~ +85	°C
Storage Temperature Range	Tstg	---	-40 ~ +100	°C
Soldering Condition	Tsd	---	265°C/5sec	°C

NOTE:

Luminous Intensity Measurement allowance is $\pm 10\%$.

$2\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

The dominant wavelength is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES (Ta=25°C)


Luminous Intensity Ranks(IF=20mA Ta=25℃)

Bin Code	Min(mcd)	Max(mcd)
Y	3130	3750
Z	3750	4500
ZA	4500	5400
ZB	5400	6480
ZC	6480	7770
ZD	7770	9300

Package

Item	Inner packaging bag	Inner packaging box
Material	Antistatic bag	Single corrugated box
Quantity	1000PCS	Single corrugated box × 10 =10000PCS
Marking	Label Marking: Type、Quantity	Certificate of conformity Marking: Product name 、 Type、Quantitye、 Date of manufacture
Size	16×23(cm)	30×19 ×11.5(cm)